


# ISM480 SiRFstarIV™ 5 Hz & 1Hz SIP GPS Module

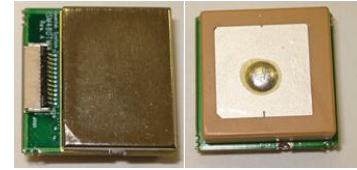

## Introduction

[Inventek Systems](#) would like to announce a new [SiRFstar IV](#) SIP GPS Receiver Module with **twice** the sensitivity of the SiRFstar III. Several key features about this module are:

- ✦ The module is capable of generating and storing extended ephemeris data to an external device for much faster hot starts in weak signal environments.
- ✦ Built-in jamming detection and mitigation to permit fast and accurate navigation solutions in high noise environments.
- ✦ Integrated 15x15 mm RHCP ceramic antenna
- ✦ An addition 4 dB in tracking sensitivity and 5 dB navigation sensitivity over the world class SiRFstar III devices.
- ✦ < 10 mW @ 1.8 volts required to maintain fixes in TricklePower mode for the ultimate in low power requirements.

The [Inventek](#) ISM480 is a 48 channel global positioning system (GPS) receiver with fully integrated antenna in a very compact package with a low cost / rugged connection scheme. The fully integrated GPS has high sensitivity, high gain, and low power. The small form factor [GPS](#) receiver is designed for a broad spectrum of OEM applications and is based on the fast and deep GPS signal search capabilities of [CSR](#) SiRFstarIV™ architecture.

## Ordering Information

Device	Description	Ordering Number
ISM480F1	GPS Module, Form Factor 1, Commercial Temp	ISM480F1-C4.1
ISM480EVB	Evaluation Board, UART/SDIO/SPI, ISM480	ISM480F1-EVB

## Features

- Host UART or SPI or I<sup>2</sup>C interface
- High sensitivity navigation engine (PVT) tracks as low as -162dBm
- 48 track verification channels
- SBAS (WAAS or EGNOS)
- Client Generated Extended Ephemeris
- Input I/O +3.3 V tolerant
- Single power supply voltage 1.8V.
- Programmable 1 or 5Hz true navigation
- Auto dismissal of jamming signals through enhanced Continuous Wave (CW) detection.
- Anti-jamming Features dismissal of jamming signals
- Removes in-band jammers up to 80 dB-Hz
- Tracks up to 8 CW jammers
- Incremental ephemeris collection allowing quicker time-to-first-fix TTFF.
- Lead Free / compliant with ROHS



### Applications

- Industrial Handhelds
- Hand-held Device for Personal Positioning and Navigation
- PDA, Pocket PC, computing devices
- Fleet Management / Asset Tracking
- AVL and Location-Based Services
- Cellular handsets
- Cameras, Asset tracking

### Package

- 16.5 mm x 16.51 mm x 7.3 mm
- 12-pin I-pex connector

### Power Ratings

- Single supply voltage: 1.8VDC  $\pm$ 5%
- Trickle Power : <10 mW
- Current: 45mA with LNA at full power

### Temperature Range

- Operating: -30°C to +85°C
- Storage: -40°C to +85°C
- Humidity: 10% to 95%, Non-condensing

### Receiver Sensitivity

- Tracking Mode: -162 dBm
- Coarse-aided : -157 dBm
- Autonomous Mode: -147 dBm

Tracking and Autonomous Acquisition Sensitivity specs were determined through the use of 12 Channel Spirent GPS Simulator in a controlled RF Laboratory Environment (Open sky).

### Performance

- Time to first Fix Hot Start: 1 sec.
- Time to first Fix Warm Start : <35 sec.
- Time to first Fix Cold Start: <35 sec.
- Re-Acquisition (Valid EE): 100 ms

### Host Interface

- SPI or UART or I<sup>2</sup>C
- NMEA-0183 or SiRF OSP

Please check [www.inventeksys.com](http://www.inventeksys.com) for the latest support.



## Inventek Systems, LLC.

2 Republic Road  
Billerica Ma, 01862

Inventek Systems reserves the right to make changes without further notice to any products or data herein to improve reliability, function, or design. The information contained within is believed to be accurate and reliable. However Inventek Systems does not assume any liability arising out of the application or use of this information, nor the application or use of any product or circuit described herein, neither does it convey any license under its patent rights nor the rights of others.